



PCT / IB 00 / 00840



21.06.00

INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 26 JUN 2000

WIPO

PCT

10/019443  
IB00/00840

4

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


Dated 11 May 2000

**THIS PAGE BLANK (USPTO)**

4 JUN 1999

07JUN99 145246473 D000682

P01/7700.0.00/ 9913102.1

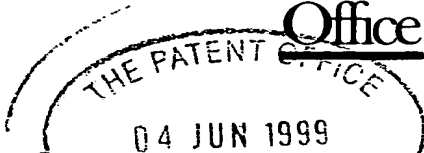

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

9913102.1

The Patent Office

Cardiff Road

Newport

Gwent NP9 1RH

## 1. Your reference

87977/KCS/DG

## 2. Patent application number

(The Patent Office will fill in this part)

## 3. Full name, address and postcode of the or of each applicant (underline all surnames)

NOKIA TELECOMMUNICATIONS oy  
KEILALAHDENTIE 4  
02150 ESPOO  
FINLAND

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND 0208193006

## 4. Title of the invention

AN ELEMENT FOR A COMMUNICATIONS SYSTEM

## 5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

PAGE WHITE & FARRER  
54 DOUGHTY STREET  
LONDON  
WC1N 2LS

Patents ADP number (if you know it)

1255003

## 6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

## 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

## 8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description

22

Claim(s)

3

Abstract

-

Drawing(s)

242 16

10. If you are also filing any of the following, state how many against each item.

Priority documents

-

Translations of priority documents

-

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

-

Request for preliminary examination and search (Patents Form 9/77)

-

Request for substantive examination (Patents Form 10/77)

-

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

*Page White & Farrer*

Date

PAGE WHITE & FARRER

04.06.1999

12. Name and daytime telephone number of person to contact in the United Kingdom

KELDA STYLE - 0171 831 7929

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

TITLEAN ELEMENT FOR A COMMUNICATIONS SYSTEM

## FIELD OF THE INVENTION

10

The present invention relates to an element for a communications system in particular but not exclusively for use in a general packet radio service (GPRS) type system. The present invention also relates to a communications system incorporating the element.

## BACKGROUND OF THE INVENTION

20

Known office based communication systems usually operate with fixed line telephone units within the office linked via an internal switch board or PBX (private branch exchange). Such fixed line systems are able to provide relatively high voice quality although users are not able to move for the duration of a call.

25

The advent of wireless cellular telecommunication technologies, an example of which is the GSM standard (Global System for Mobile communications) means that wireless systems can provide at least the equivalent voice quality as compared to fixed line systems. Wireless cellular systems also have the advantage that the user can move.

30

35

WIO "wireless intranet office" is a proprietary communication system which is being developed by the present applicants. This WIO system introduces the concept of utilizing mobile terminals, such as conventional GSM mobile stations, in an office environment. The system makes use of a known concept called Internet telephony or voice-over-IP. (IP stands for Internet protocol.)

40

Voice-over-IP allows audio, video and data information to be

5 transmitted over the existing IP-based local or wide area networks, or the Internet. The technology thus provides for convergence and integration of the communication of three different data types over the same network.

10 Prior to the introduction of voice-over-IP, offices often operated three separate networks for the transmission of audio, video and data information. Fixed line telephone systems coupled to an in-house PBX provided voice communication. An office based  
15 local area network (LAN) or intranet (i.e. a packet switched internal network) having computer terminals linked via network cards and under the control of a server station provided for the transmission of "conventional" computer data. Video cameras linked to monitors via a fixed line or wireless link provided for video communications. With voice-over-IP, audio, video and data  
20 information can be transmitted simultaneously using the same packet-switched network or LAN throughout the office environment and beyond the confines of the office.

In order to provide for such media convergence, voice-over-IP  
25 often uses a specific ITU (International Telecommunication Union) standard protocol to control the information flow over the intranet. One common standard protocol used in voice-over-IP systems, and the one used in the WIO system is termed H.323. H.323 is an ITU standard for multimedia communications (for  
30 example voice, video and data) and allows multimedia streaming over conventional packet-switched networks. The protocol provides for call control, multi media management and bandwidth management for both point-to-point (two end users in communication) and multi point (three or more end users in communication)  
35 conferences.

The H.323 protocol is network, platform and application independent allowing any H.323 compliant terminal to operate in conjunction with any other terminal.

40 The H.323 standard defines the use of three further command and

5 control protocols. H.245 is for call control and is responsible  
for control messages governing the operation of the H.323  
terminal including capability exchanges, commands and  
indications. Q.931 is for call signalling and is used to set up  
a connection between two terminals. The RAS (Registrations,  
10 Admissions and Status) signalling function governs registration,  
admission and bandwidth functions between endpoints and  
gatekeepers. Gatekeepers will be discussed in more detail  
hereinafter.

For a H.323 based communication system, the standard defines four  
major components: terminals; gateways; gatekeepers; and multi  
point control units (MCU).

20 Terminals are the user end-points on the network and can be a  
telephone mobile or fixed, a fax unit or a computer terminal. All  
H.323 compliant terminals must support voice communications and  
optionally video and data communications.

25 Gateways connect H.323 networks to other networks or protocols.  
For an entirely internal communications network, i.e. one with  
no external call facility, gateways are not required.

30 Gatekeepers are the control centres of the voice-over-IP network.  
It is under the control of a gatekeeper that most transactions  
(communication between two terminals) are established. The  
primary functions of the gatekeeper are, bandwidth management,  
call control controlling the number of simultaneous H.323  
connections and controlling the amount of bandwidth those calls  
consume. An H.323 "zone" is defined as a collection of all  
35 terminals, gateways and multi point-control units (MCU) which are  
managed by a single gatekeeper. Multi point control units (MCU)  
support communications between three or more terminals. The MCU  
comprises a multi point controller (MC) which performs H.245  
negotiations between all terminals to determine common audio and  
40 video processing capabilities, and a multi point processor (MP)  
which routes audio, video and data streams between terminals.

5 The conventional voice-over-IP system described hereinbefore normally utilizes standard fixed-line telephone systems which are subject to the disadvantages of a lack of mobility and a lack of user commands.

10 The WIO concept takes voice-over-IP further in that it provides for the use of conventional mobile terminals, such as GSM mobile stations, within the voice-over-IP system. To provide for such mobile communications within an intra-office communication network, the WIO system combines known voice-over-IP with the use  
15 of conventional wireless terminals within the voice-over-IP system. Those telephone units may be GSM mobile stations. This WIO concept may be in the context of a intra-office communication network.

20 Thus, in the WIO system intra-office calls to mobile stations are routed through the office intranet and external office calls are routed conventionally through the GSM network. Such a system provides most or all of the features supported by the mobile station and the GSM network such as telephone directories, short  
25 messaging, multiparty services, data calls, call barring, call forwarding etc. WIO thus provides for integrated voice, video and data communications by interfacing an H.323 based voice-over-IP network with a GSM mobile network.

30 The WIO system is a cellular network similar to the conventional GSM network and is divided into H.323 zones as discussed hereinbefore. One H.323 zone may comprise a number of GSM cells. Two or more H.323 zones may be contained within an administrative domain.

35 The General Packet Radio Service (GPRS) standard has been proposed in the context of the GSM standard for the communication of data packets in a wireless network. Typical GPRS elements are: gateway GPRS support nodes (GGSN) which act as a gateway between  
40 the GPRS system and an external packet switched network; and serving GPRS support nodes (SGSN) which are connected between the



5 GGSN and a base station system and keep track of the location of mobile stations, perform security functions and access control. These elements are in addition to the usual network elements. To date, the WIO system has not supported GPRS.

10 The GPRS service is usually provided by the operator of the GSM wireless network. This means that even if the GPRS service is provided between two users within an internal corporate network, the external operator will levy a charge. If a company decides to invest in a corporate network, the company will not want to pay the external operator for calls which are entirely within the corporate wireless network, regardless of whether the call is a voice or data oriented.

#### SUMMARY OF THE INVENTION

20

It is an aim of embodiments of the present invention to allow the proposed WIO concept or the like to support a GPRS service or the like. It is an aim of further embodiments of the present invention to address the problem discussed hereinbefore.

25

According to one aspect of the present invention, there is provided a network element, said network element being arranged to act between a first IP based network and a second packet data network, said element comprising a first interface arranged to communicate with said first IP based network using said IP protocol to receive signals from and send signals to the first network, a second interface arranged to communicate with said second network via an IP based connection to receive signals from and send signals to the second network.

35

According to a second aspect of the present invention, there is provided a communication system having a first IP based network and a second packet data network, the first and second networks being connected by a network element as defined above.

40

#### BRIEF DESCRIPTION OF DRAWINGS

5 For a better understanding of the present invention and as to how the same may be carried into effect, reference will now be made by way of example to the accompanying drawings in which:

Figure 1 shows a block diagram of a WIO system;

10 Figure 2 shows a block diagram of a modified WIO system with GPRS capability; and

Figure 3 shows a block diagram of the intranet GPRS support node of Figure 2.

#### DESCRIPTION OF PREFERRED EMBODIMENT

15 Reference will now be made to Figure 1 which shows a WIO network.

20 In the office environment 100, the WIO system is implemented. The WIO system has an IP (Internet protocol) based LAN 10 which is operable to carry packet form data.

25 One or more mobile stations (MS) 1 communicate, i.e. transmit signals to and/or receive signals from, a base transceiver station (BTS) 2. The base transceiver station 2 used in the WIO system is similar to the base transceiver stations used in conventional GSM cellular communications systems in that the base station 2 is connected to, and operates in conjunction with, a controller. In a conventional GSM system, the controller is termed a base station controller (BSC). However, in the WIO system, the controller is represented by a GSM radio access gateway 3, the function of which will be described hereinafter. The base transceiver station 2 therefore receives signals transmitted by the mobile station 1 and forwards them to the GSM radio access gateway 3. The GSM radio access gateway 3 is also  
35 connected to the LAN 10.

40 A WIO gatekeeper (WGK) 4 is connected to the LAN 10 as is a H.323 terminal 5. The H.323 terminal 5 may be represented by a computer terminal which may support voice and data communication.

Connected to the LAN 10 is a GSM gateway (GGW) 8. The GSM gateway

8 is connected to a standard GSM network 40 as used in conventional mobile communication systems. The network is sometimes referred to as a public land network. The WIO system allows for the use of mobile telephones in the office environment to make both internal and external office calls.

Typical components of a standard GSM network 40 are shown in Figure 1. Mobile stations 105 and 108 are associated with respective base transceiver stations 110 and 112. The respective base transceiver stations (BTS) 110 and 112 are both controlled by the same base station controller (BSC) 114. Communications are controlled by a mobile services switching centre (MSSC) 116 and accordingly, signals from the base station controller 114 are output to the mobile services switching centre 116 via a transcoder and substrate channel multiplexer (TCSM) 118. Likewise, commands for the base station controller 114 from the mobile switching centre 116 pass via the transcoder and substrate channel multiplexer 118. The mobile services switching centre 116 also incorporates a visitor location register (VLR). The mobile switching centre 116 has access to a home location register (HLR) 120. In practice, a large number of base transceiver stations are provided and there may be more than one base station controller and mobile services switching centre 116.

It should be appreciated that signals from the GSM gateway 8 for the GSM network are forwarded to the mobile services switching centre 116 and vice versa.

The functions of the WIO components of Figure 1 will now be described in more detail. The GSM radio access gateway 3 performs similar functions to that of a base station controller in a conventional GSM network such as the management of radio resources and channel configuration and the handling of the base transceiver station configuration. However, the GSM radio access gateway 3 also provides conversion from the GSM voice data to packet based data suitable for transmitting on the packet based LAN 10. During a call, therefore, the GSM radio access gateway

5     3 converts the voice data transmitted by the base station 2 to  
the GSM radio access gateway 3 into packet-based data suitable  
for transmitting on the LAN 10.

10     The WIO gatekeeper 4 is the main controller of the WIO system and  
has a high processing capability. It is responsible for all of  
the functions which the H.323 protocol defines to its gatekeeper,  
including call management and call signalling. It is also  
15     responsible for mobility management. The WIO gatekeeper 4 is able  
to manage the main different call types such as voice, data,  
facsimile and conference calls which can be established between  
a mobile station, a computer terminal and a normal telephone in  
any combination.

20     The GSM gateway 8 handles communications between the WIO  
environment and the mobile switching centre 116 of the GSM  
network 40. From the mobile services switching centre 116  
viewpoint, the WIO appears to be a conventional base station  
subsystem. The GSM gateway 8 also provides isolation means for  
25     disconnecting the WIO system from the mobile services switching  
centre 116 in the event of WIO system failure.

30     The telephone calls managed by the WIO system can be divided into  
internal and external calls. With internal calls. Both users are  
in the WIO environment when the call is an external call, only  
one user is in the WIO environment.

35     Reference is now made to Figure 2 which illustrates how the  
system shown in Figure 1 can be modified to provide a general  
packet radio service (GPRS). The external network connected to  
the WIO environment 100 is a GPRS network 200 which has GSM and  
GPRS capabilities. In order to implement the GPRS network 200,  
the usual GSM components are used, generally with the addition  
of two further GPRS network nodes, the serving GPRS support node  
(SGSN) 186 and the gateway GPRS support node (GGSN) 182. The SGSN  
40     186 is connected between the GGSN 182 and the base station system  
188 and keeps track of the mobile stations and performs security

5 functions and access control. The GGSN 182 acts as a gateway between the GPRS system and another packet data network (PDN) 190.

10 In the office environment 100, an intranet location register (ILR) 128 is provided. The intranet location register is connected to an Intranet GPRS support node IGSN 130 which will be described in more detail hereinafter. This may be via, for example the LAN 10 of the system of Figure 1. The intranet location register 128 effectively provides the function of a home location register. However, unlike the home location register which is controlled by the network operator, the intranet location register 128 is accessible by the authorised employees of the company, such as managers of the internal network, using the WIO system. In other words, the intranet location register 20 128 can be corporate based.

It is alternatively possible for the intranet location register 128 to be Internet service provider based. This register 128 allows a user within the WIO environment 100 to use a GPRS 25 service where the originator and destination are both within the WIO office environment without any signalling occurring externally of the office network.

30 The intranet location register 128 contains a database of subscribers in the company and allows the users to be authenticated within the company network. The intranet location register 128 also stores information as to whether a given user is permitted to roam outside the company network. The intranet location register 128 permits free GPRS services to be offered 35 within the corporate network even if the intranet is geographically distributed.

40 The intranet location register 128 is LDAP (lightweight directory access protocol) based. LDAP is a protocol which is an IETF (Internet Engineering Task Force) standard. This protocol is a standardized protocol for the accessing subscriber and

5 device configuration information in "directory enabled" Internet  
protocol networks. "Directory enabled" Internet protocol networks  
rely on a register(s) storing relevant information on the users  
within the office environment 100. This information includes  
10 information on the identity of the users as well as device  
configuration information of the user.

The protocol which is used by the intranet location register 128  
is selected so as to be compatible with or the same as protocols  
used by information technology departments of corporations. This  
15 allows the information technology departments to manage the  
register easily. It also allows for simple implementation of the  
register 128 on a personal computer or the like. This means that  
embodiments of the invention can be implemented in a cost  
effective manner.

20 The GSM gateway 8 of Figure 1 can be modified to incorporate GPRS  
signalling support so that a user within the WIO environment is  
able to communicate with the external world using the GSM network  
to transmit GPRS packets of data. This signalling also permits  
25 an external user using the GSM network to send GPRS packets of  
data to a user within the WIO office. This means that GPRS  
tunnelling protocols are supported by the GSM gateway 8.  
Additionally home location register 120 related GPRS signalling  
support is added to the GSM gateway 8.

30 However, an alternative preferred embodiment will now be  
described in relation to Figure 2.

In the following discussion, the following abbreviations are  
35 used:

SS7 Signalling System No 7 (ITU standard, the common language  
between telephone networks).

40 MAP Mobile Application Part (part of the TCP/IP protocol suite,  
specific to GSM).

TCAP Transaction Capabilities Application Part (part of the

- 5 TCP/IP protocol suite).
- SCCP Signalling Connection Control Part (part of the SS7 protocol suite).
- MTP3 Message Transfer Protocol, Level 3 (part of the SS7 protocol suite).
- 10 MTP2 Message Transfer Protocol, Level 2 (part of the SS7 protocol suite).
- MTP1 Message Transfer Protocol, Level 1 (part of the SS7 protocol suite).
- GTP GPRS Tunnelling protocol.
- L2TP Layer 2 Tunnelling Protocol.
- TCP Transmission Control Protocol (part of the TCP/IP protocol suite, maintained by IETF).
- UDP User Datagram Protocol (part of the TCP/IP protocol suite, maintained by IETF).
- 20 IP Internet Protocol (part of the TCP/IP protocol suite, maintained by IETF).
- IPSec IP Security extensions to the TCP/IP protocol suite (IETF).
- MIP Mobile IP, mobility extensions to the TCP/IP protocol suite (IETF).
- 25 EIR Equipment Identity Register.
- BSS Base Station Subsystem.
- ITU International Telecommunications Union.
- IETF Internet Engineering Task Force.
- 30 VLR Visitor Location Register.
- SMS-GMSC Short Message Service Gateway Mobile Switching Centre.
- HLR Home Location Register.
- EIR Equipment
- 35 It should be noted that the protocol layers MTP1-2 define the physical implementation of the "narrowband" SS7 network. The MTP3 layer of the SS7 protocol suite is used to transfer messages between two addresses, in a "narrowband" SS7. The MTP3 layer includes features which makes SS7 relatively tolerant to physical
- 40 faults. Application level signalling messages which are transaction specified such as MAP messages, are transferred over

5 the TCAP layer. The TCAP layer within SS7 is transferred over the SCCP layer. The SCCP layers relies on the MTP3 layer for addressing and some level of fault tolerance. All signalling toward SS7 networks within GPRS is based on MAP.

10 In an IP based network, application level messages may be transferred e.g. via UDP (with no guarantee that message was ever received by recipient) or via TCP (which includes "handshaking" and retransmission mechanisms, that guarantee delivery within certain constrains, if physically possible). The TCP/IP protocol  
15 suite does not go down to the physical levels, so it does not inherently include the level of fault tolerance introduced by MTP3 to the full SS7 protocol stack.

20 TCP/IP can be made relatively reliable, by designing the physical network in a reliable way, independent of the higher level TCP/IP protocols. The upper levels of SS7 may in practice be carried of TCP/IP based network although this is not yet standardised.

25 As an alternative to the modified GSM gateway, a more general signalling gateway 106 in the GPRS network 200 can be provided which acts a relay between TCAP/SCCP/MTP3/MTP2/MTP1 protocols of the GPRS network 200 and TCAP/UDP/IP protocols of the WIO network 100. The signalling gateway 106 is required to implement the functions of the Gs (between the SGSN and the VLR) interface, the  
30 Gd (between the SGSN and the SMS-GMSC) interface, the Gr (between the SGSN and the HLR) interface, the Gc (between the GGSN and the HLR) interface and the Gf (between the SGSN and the EIR) interface. The signalling gateway 106 permits the IGSN 130 to support the functions of these interfaces over IP without having  
35 to support the SS7 protocol by carrying out the necessary protocol conversions.

40 The signal gateway does not modify application level signals but does modify the transmission level signals as the signalling gateway acts as a mediator between the two physically different types of networks.



5

10

The intranet GPRS support node (IGSN) 130 is provided to add GPRS backbone functionality, that is the function typically provided by the service GPRS support nodes and gateway GPRS support nodes, into the WIO office network. In other words the IGSN 130 provides some of the same functionality which is provided by the SGSN 186 and the GGSN 182 in the GPRS network 200. The IGSN 130 implements therefore a combination of SGSN and GGSN functionality with appropriate modifications to make the IGSN 130 as a single standard alone element which can be included in the office or the like of a corporate user. The IGSN 130 is connected either directly or via the LAN 10 to the intranet location register 128, the intranet 190 and the GSM radio access gateway 3.

20

25

30

35

The modifications involve removing any non-IP based external interfaces from the corporate user's version of GPRS. Thus, there are two modified interfaces compared to standard GPRS elements. Firstly the frame relay based station controller interface, known as Gb in GPRS must be modified to allow communication with the GSM radio access gateway 3 using the Internet protocol. The interface between the SGSN 186 and the base station system 188 is the Gb interface in the conventional GPRS system 200. The GSM radio access gateway 3 may be functionally equivalent to the base station controller of a conventional GPRS system. The protocol stack which implements the interface using the Internet protocol between the IGSN 130 and the GSM radio access gateway 3, could be e.g. BSS Gb/L2TP/IP or BSS Gb/GTP/UDP/IP. Both L2TP and GTP are known tunnelling protocols, which can be used to carry BSS Gb over IP. Any other tunnelling protocols may alternatively be used to carry BSS Gb-over-IP. These protocol stacks permit signals received in the format usually used in the Gb interface to be converted to IP signals.

40

Secondly, the SS7 based interfaces with the GSM core networks network elements must be modified, so that the Intranet-GSN 130 may communication with them over an IP based interface. The SS7 interfaces are with the MSC/VLR (i.e. the Gs interface in GPRS),

5 with the short message service gateway mobile switching centre  
(SMS-GMSC) (Gd interface), with the HLR (Gr and Gc interfaces),  
and the EIR (Gf interface). All of these interfaces of the known  
GPRS system use a subset of the GSM-MAP protocol (Mobile  
Application Part) over a TCAP/SCCP/MTP3/MTP2/MTP1 protocol stack.  
10 The IGSN 130 instead implements a MAP/TCAP/UDP/IP protocol stack  
to communicate with a network element in the operator's network  
acting as a signalling gateway i.e signalling gateway 106. In  
other words communications between the IGSN 130 and the GPRS  
network 200 is via this stack so that signals for the office  
15 network are in the IP format and signal from the office network  
to the GPRS network are in the MAP format.

As can be seen from Figure 2 the intranet GPRS support node 130  
is connected to the intranet location register 128, the intranet  
20 190 which may be the same or different to LAN 10, the GSM radio  
access gateway and a wireless local area network 192 (i.e. the  
network including the mobile stations 1 and base transceiver  
stations 2).

25 The IGSN 130 may incorporate signalling support for the GSM  
gateway 8 if there is not separate signalling gateway 106.

The GPRS signalling from the external environment is converted  
by the IGSN 130 into LDAP protocol requests for those subscribers  
30 who are managed by the corporate department or Internet service  
provider managing the WIO environment. In other words, the  
operator of the WIO environment can take the place of the GSM  
service provider and the intranet location register 128 can take  
over the function of the home location register. The IGSN 130  
35 therefore masks the existence of the LDAP data base from the rest  
of the GPRS network 200.

The intranet GPRS support node 130 can also act in similar manner  
to the gateway GPRS support nodes and border gateways between  
40 different operators in convention GPRS systems. The Gp interface  
202 between the GPRS backbones of two telecommunication operators

5 is provided by border gateway 104 functionality. The border gateway functionality is incorporated in the IGSN 130 providing it with a secure IP based tunnel over the Internet, to the GPRS backbone operated by the network operator, i.e network 200. The WIO environment 100 and the GPRS networks 200 can be regarded as  
10 separate networks each of which has a border gateway 104 or border gateway functionality to allow secure communications between the networks.

15 One way to implement this functionality in the IGSN is to provide an IPsec based tunnel from the IGSN 130 to the border gateway 104 of the GPRS network 200. The border 104 gateway of the network 200 may typically be an firewall router product. Any other secure IP based virtual private network (VPN) technology may be alternatively used. It is also possible to have a dedicated line  
20 between the border gateway 104 and the IGSN 130.

The intranet GPRS support node 130 thus acts as a gateway between the intranet location register 128 and the GPRS network 200 operated by the external operator. Thus the intranet GPRS support  
25 node 130 converts GPRS signals from the GSM network into a form in which they are compatible with the intranet location register 128 of the WIO office. Likewise, the intranet GPRS support node 130 ensures that signals intended to be GPRS signals in the GSM network from the WIO office are converted into a form compatible  
30 with the GPRS service.

The operability of the intranet GPRS support node 130 supported WIO office and the external GSM network providing the GPRS service is established with roaming agreements between the GSM  
35 network operator and the WIO office provider. The link between the GSM operator which provides the GPRS service and the intranet GPRS support node 130 is as discussed hereinbefore provided by the border gateway 104 and the border functionality of the IGSN 130. The border gateway 104 and border functionality of the IGSN  
40 130 provides a link similar to that provided by gateways between different GSM operators in conventional systems.

5 The GPRS network 116 comprises the usual GPRS components including: mobile switching centre MSC and visitor location register VLR 116; home location register HLR 120; short message service gateway mobile switching centre/short message service interworking mobile switching centre SMS-GMSC/SMS-IWMSC 178;  
10 short message service centre SMS-SC 170; gateway GPRS switching node GGSN 182 providing a connection to other packet data networks PDN 184; serving GPRS support node SGSN 186; and base station subsystem BSS 188. The border gateway BGW 106 may be connected to another public land mobile network PLMN 189.

15 It should be appreciated that the intranet GPRS support node 130 does not need to provide all the functions of conventional serving GPRS support nodes in that only Internet protocol interfaces are required. As discussed hereinbefore, known serving  
20 GPRS support nodes typically have more than one interface to deal with, such as frame relay and the SS7 protocols as well as interfaces to deal with the Internet protocol.

Reference is made to Figure 3 which shows a block diagram of the  
25 intranet GPRS support node 130 of Figure 2. Figure 3 shows schematically the functions of this node. The intranet GPRS support node 130 has a first part 132 which provides the gateway GPRS support node functionality and a second part 134 which provides the serving GPRS support node functionality with the  
30 Internet protocol function. Additionally a third part 136 provides a firewall and virtual private network function. This latter function allows secure (encrypted) tunnels between geographically distributed intranet sites over the Internet. Any suitable product can be used to achieve this function.

35 The first part 132 has a first register 138 which stores information relating to the packet data protocol PDP context management and the access point. The first part 132 also has a intranet GPRS support node element manager and access point and session manager 142. The access point and session manger 142 has,  
40 via the third part 136, connections for the user's Internet

5 protocol traffic between the WIO office and a public Internet port 152 or a private intranet port 154. The public Internet port 152 allows the connection with a public network eg network 200 of Figure 2. The private intranet port 154 allows the connection with the WIO network of Figure 1.

10 The second part 134 has a register 144 for storing GPRS mobility management information and packet data protocol PDP context information. The second part 134 also has a serving GPRS support node registration services part 146 and a location and session manager 148. The location and session manager 148 and the access point and session manager 142 are connected together by a connection 150 using the GPRS tunnelling protocol GTP to allow the exchange of information there between. The location and session manager 148 is also connected via the firewall 136 to the  
20 public Internet and private Intranet ports 152 and 154.

The third part 136 of the intranet GPRS support node 130 provides a firewall function and thus prevents unauthorised communications from taking place between the private intranet and the public  
25 Internet.

The public Internet port 152 has two tunnels or connections. The first connection 156 allows a connection with an Internet access point, eg to an IP network. This connection 156 receives and provides Internet protocol traffic of the users from and to the  
30 access point and session manager 142. The second connection 158 of the public Internet port 152 provides a connection to the home network (PLMN public land mobile network) backbone. This second connection 158 receives traffic from and provides traffic to the  
35 location and session manager 148 and the access point and session manager 142. This traffic consists of GPRS tunnelling protocol traffic to and from the location and session manager 158 and the access point and session manager 142 and GPRS domain name system traffic from the location and session manager 148.

40 The private intranet port 154 has three connections 160 to 164.

5 The first connection 162 provides a tunnel or connection to the intranet access point and receives traffic from and provides traffic to the access point and session manager 142. This traffic comprises the user's Internet protocol traffic. The second connection 162 provides a connection to the GSM radio access gateway 3 as does the third connection 164. The second and third connections 162 and 164 receive and provide GPRS mobility management and session management signalling.

15 This intranet GPRS support node 130 has the advantage that the interfaces between the base station 2 and the serving GPRS support node, between the base station 2 and the mobile services switching centre 116, between the serving GPRS support node and home location register 120 are tunnelled or connected using the Internet protocol. This allows embodiments of the present invention to be implemented more simply and more cheaply as compared to the corresponding network element used in the currently proposed GPRS systems. In some embodiments, the Ethernet may be used instead or in addition to the Internet.

25 Traffic intended for a user within the WIO environment from another user within the WIO environment does not need to travel over the Internet back to the intranet via the remote operator Public Land Mobile Network gateway GPRS support node 182. This improves both performance and security.

30 A summary of the steps taken to establish a GPRS connection within the office environment WIO are as follows:

- 35 1. Mobile terminal sends an Attach Request to IGSN 130 using its SGSN function via the GSM Radio Access Gateway 3.
2. IGSN optionally uses the LDAP protocol to check if the identified terminal is a subscriber of the intranet local register 128.
- 40 3. If the identity code is found from the LDAP based intranet-local register 28, the user is authenticated (exchange of authentication data between the intranet location register

- 5 and the mobile terminal, via, IGSN 130 and the GSM radio access gateway 3. Finally the IGSN 130 sends an attach accept message to the mobile terminal 1 via the GSM radio gateway 3. Go to step 6.
- 10 4. If the identity code was not found in the intranet location register a query is made via the signalling gateway 106 to the home location register 120 in the PLMN network 200.
5. If the identity code is found in the home location register 120, the user is authenticated (exchange of authentication data between the home location register 120 and the mobile terminal 1 via the IGSN 130, signalling gateway 106 and the home location register 120. The IGSN 130 sends an attach accept message to the mobile terminal 1 via the GSM radio access gateway 3.
- 20 6. To get an Internet protocol address, the mobile terminal then sends an activate packet data protocol context request to the IGSN 130 using its SGSN function via the GSM radio access gateway 3.
- 25 7. The IGSN's 130 SGSN function sends internally a corresponding create packet data protocol context request to its own GGSN function.
8. The IGSN's 130 GGSN function allocates an IP address to the mobile terminal by replying internally to the IGSN's 130 SGSN function with a create packet data protocol context response message.
- 30 9. The IGSN's 130 SGSN part then sends activate packet data protocol context accept message to the mobile terminal via the GSM radio access gateway 3.
10. Now the session is established and the external computers may communicate to the mobile terminal using IP via the IGSN 130 and the GSM radio access gateway 3.
- 35

Those same steps except steps 2 and 3 are used to establish a connection with the external environment.

- 40 The GSM radio access gateway 3 can be modified so as to deal with HIPERLAN based radio access or any other wireless local area

5 network based access. HIPERLAN is a local area network standard.  
This may be as an alternative or additional to the radio access  
based on the GSM standard. It is possible to modify the mobile  
telephones so that they use HIPERLAN based radio access. Again  
this may be as an alternative to or additional to the use of the  
10 GSM standard. In the latter case dual mode telephones could be  
provided which can use both the GSM standard and the HIPERLAN  
based radio access. This is advantageous in that HIPERLAN could  
be used in the WIO office and GSM used in the external  
environment. This improves performance within the local area  
15 network of the WIO office and allows the roaming infrastructure  
provided by GSM to be used when the telephone is outside the WIO  
environment.

20 This can be achieved by integrating mobile IP home and foreign  
agent functionality in the IGSN 130 i.e. roaming. By adding  
wireless LAN support in an interface of the IGSN and by  
integrating the mobile IP Internet protocol with the IGSN's GGSN  
function (IP address allocation, session management), roaming can  
be achieved. When roaming outside the wireless local area network  
25 coverage area, a session must be re-established using GPRS  
protocols, but the same Internet protocol address may be re-used  
by the dual mode terminal.

30 In some embodiments of the invention, the intranet location  
register can be omitted. Instead the home location register of  
the network operator can be used to store the required  
information. The home location register is connected to the  
intranet, via the signalling gateway 106 and the IGSN 130 at the  
corporate premises. The home location register includes WIO and  
35 GPRS functionality. If the network operator supports location  
based billing schemes, the GPRS service may be provided with a  
discount to users accessing the service via the customer's GSM  
radio access gateway 3 and the IGSN 130.

40 It should be appreciated, that in some embodiments, the intranet  
GPRS support node is only connected to the GSM radio access



5 gateway 3 within the office environment. The other connections shown within the office between the intranet GPRS support node 130 and the wireless local area network 192, the intranet 190 and the intranet local register 128 are all optional.

10 The WIO network may instead be a network provided by an Internet service provider.

Whilst preferred embodiments of the present invention have used the LDAP protocol, any other suitable protocol can be used. Likewise whilst the preferred embodiment of the present invention has been described in the context of a GPRS service, embodiments of the present invention may use any other suitable data service. Likewise embodiments of the present invention are also compatible with any suitable wireless communications standard or method as well as GSM.

20 In the preferred embodiment of the present invention, the Internet protocol is used for the payload within in the WIO office and for connections between the WIO office and the GSM network.

25 The embodiment of the present invention described hereinbefore allows the information technology department of a corporation to manage its own user base and hence to manage its internal radio network. In particular GPRS communications which both originate and arrive at users within the internal network may not incur charges with the operator which manages the external network to which the corporate network is connected for external communications.

35 Embodiments of the present invention have the advantage that an integrated wireless system can be provided for both voice and data communication within an office which is compatible with the protocols which are used in the office. The protocols which are preferred in the office environment may be different to those used in the networks. Embodiments of the present invention also

40

5 are compatible with the Internet, the Internet protocol or other  
protocols which are typically used or proposed to be used in the  
office environment in computer networks. This means that those  
with information technology experience are able to manage the  
internal corporate network.

5

Claims:

10

1. A network element, said network element being arranged to act between a first IP based network and a second packet data network, said element comprising:

a first interface arranged to communicate with said first IP based network using said IP protocol to receive signals from and send signals to the first network, said first IP based network being a private computer based network comprising wireless capabilities,

a second interface arranged to communicate with said second network via an IP based connection to receive signals from and send signals to the second network.

20

2. A network element as claimed in claim 1, wherein said first interface uses a tunnelling protocol to communicate with the first network.

25

3. A network element as claimed in claim 2, wherein said tunnelling protocol is one of:

L2TP and GTP.

30

4. A network element as claimed in claim 1, 2 or 3, wherein said second network is a GPRS network and said network element incorporates serving GPRS support node and gateway GPRS support node functionality.

35

5. A network element as claimed in any preceding claim, wherein said second interface includes one or more of the following layers in its protocol stack:

MAP; TCAP; UDP; IP.

40

6. A network element as claimed in any preceding claim, wherein said second interface is arranged to communicate with a gateway element of said second network.

5 7. A network element as claimed in any preceding claim, wherein the first interface uses the LDAP protocol to communicate with at least one element of said first network.

10 8. A communications system comprising a first IP based network and a second packet data network, said first and second networks being connected by a network element as claimed in any one of the preceding claims.

15 9. A system as claimed in claim 8, wherein said second network is connected to said element by a border gateway.

10. A system as claimed in claim 9 wherein said border gateway and said element are connected by a tunnel.

20 11. A system as claimed in claim 9, wherein said second network is connected to said element by a virtual private network.

25 12. A system as claimed in any of claims 8 to 11, wherein at least one of said first and second networks at least partially comprises a wireless communication part.

13. A system as claimed in claim 12, wherein the wireless communication part uses the GSM standard.

30 14. A system as claimed in claim 12, wherein said second network is general packet radio service network.

15. A system as claimed in any of claims 8 to 14, wherein said first network is a WIO network.

35 16. A system as claimed in any one of claims 8 to 15, wherein said first network comprises a register for storing information relating to users in said first network, said register being arranged to be connected to said element.

40 17. A system as claimed in claim 16, wherein said register is

5 in accordance with the LDAP protocol.

10 18. A system as claimed in any of claims 8 to 15, wherein said second network comprises a register for storing information relating to users in the first network, said register being accessible by said element.

19. A system as claimed in claims 16, 17 or 18, wherein said register stores information relating to the configuration of the users.

20 20. A system as claimed in any of claims 8 to 19, wherein a signalling gateway is provided in said second network to modify signals to and from said first network to be compatible with said second network and vice versa.

25 21. A system as claimed in any of claims 8 to 20, wherein dual mode terminals are provided to permit a user to use a wireless local area network mode in the first network and a GPRS mode in the second network.

22. A system as claimed in any of claims 8 to 21, wherein said element is part of said first network.

**THIS PAGE BLANK (USPTO)**

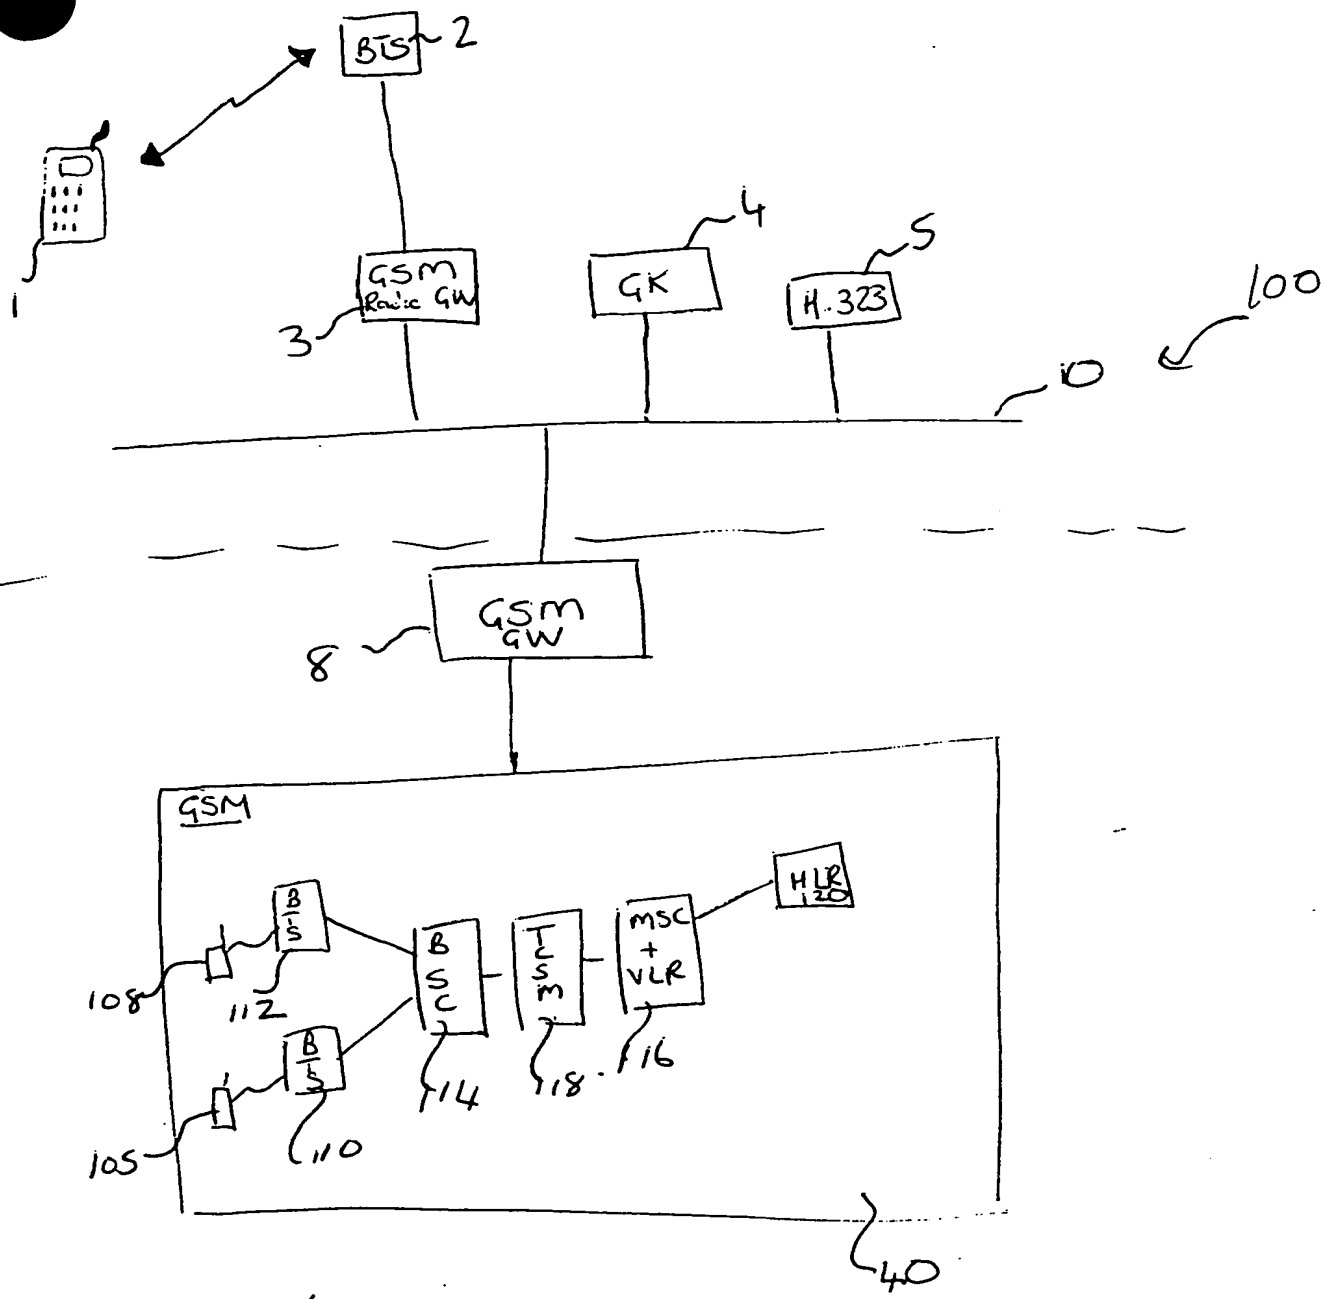


Figure 1

**THIS PAGE BLANK (USPTO)**



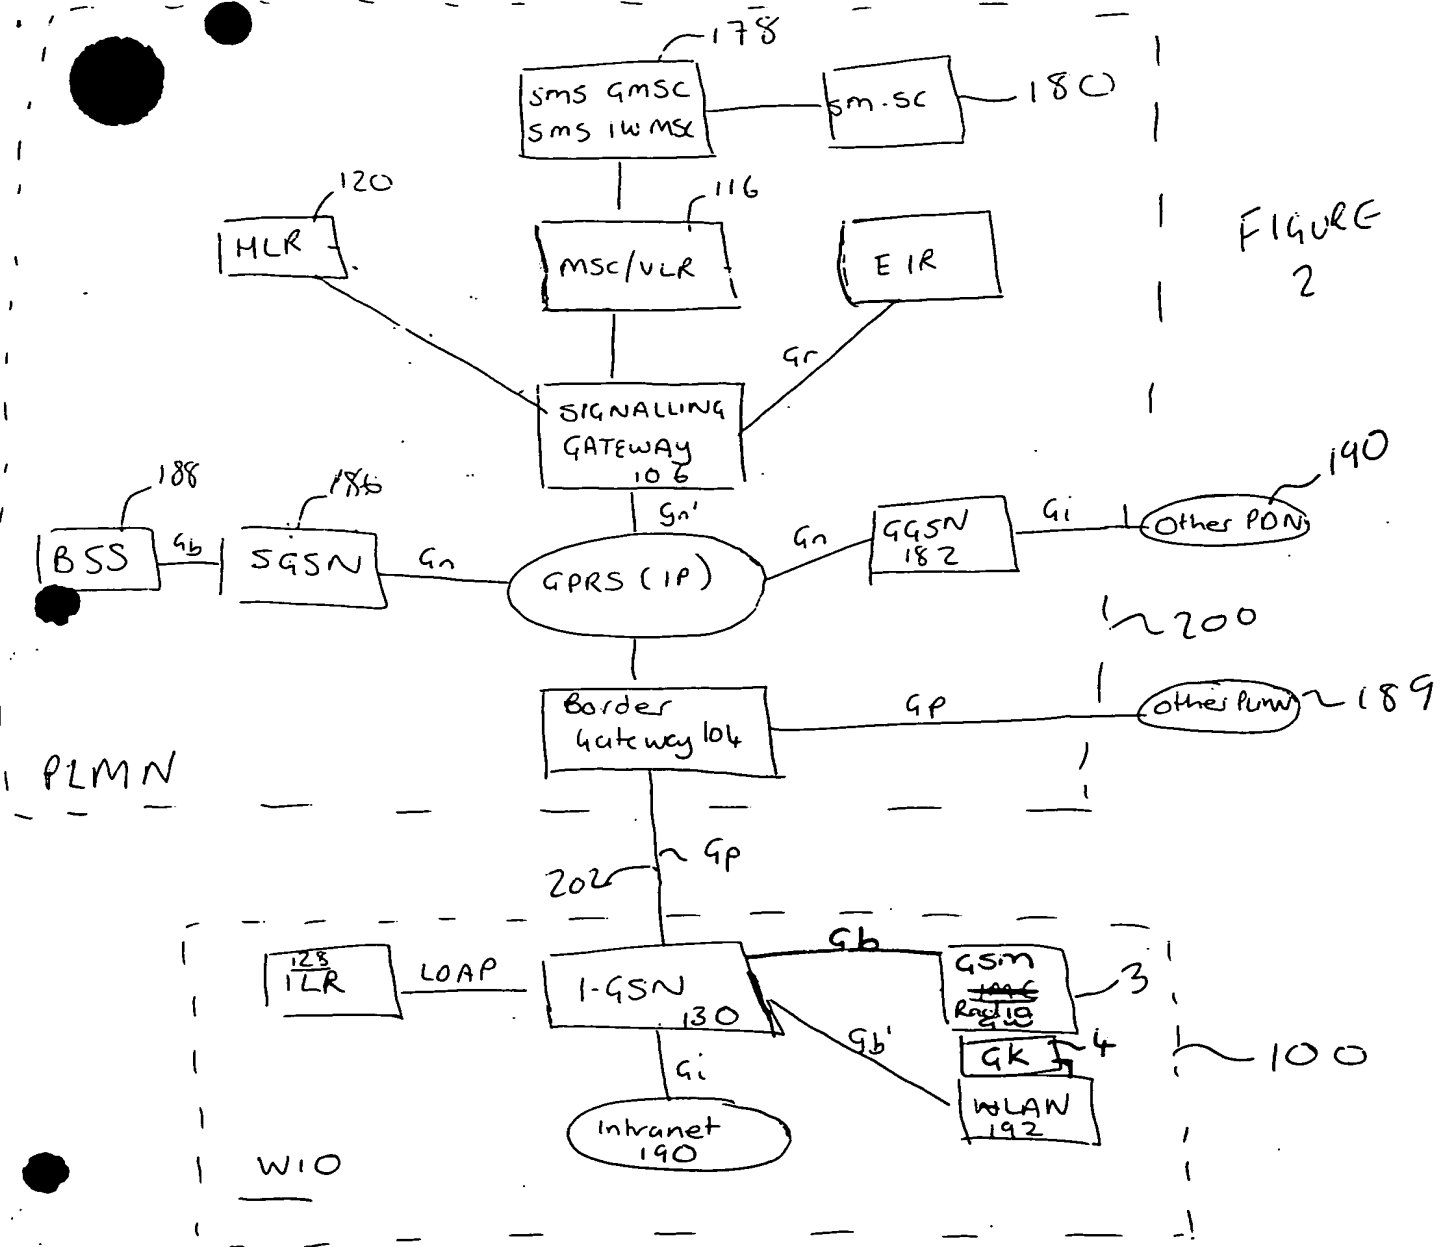


FIGURE 2

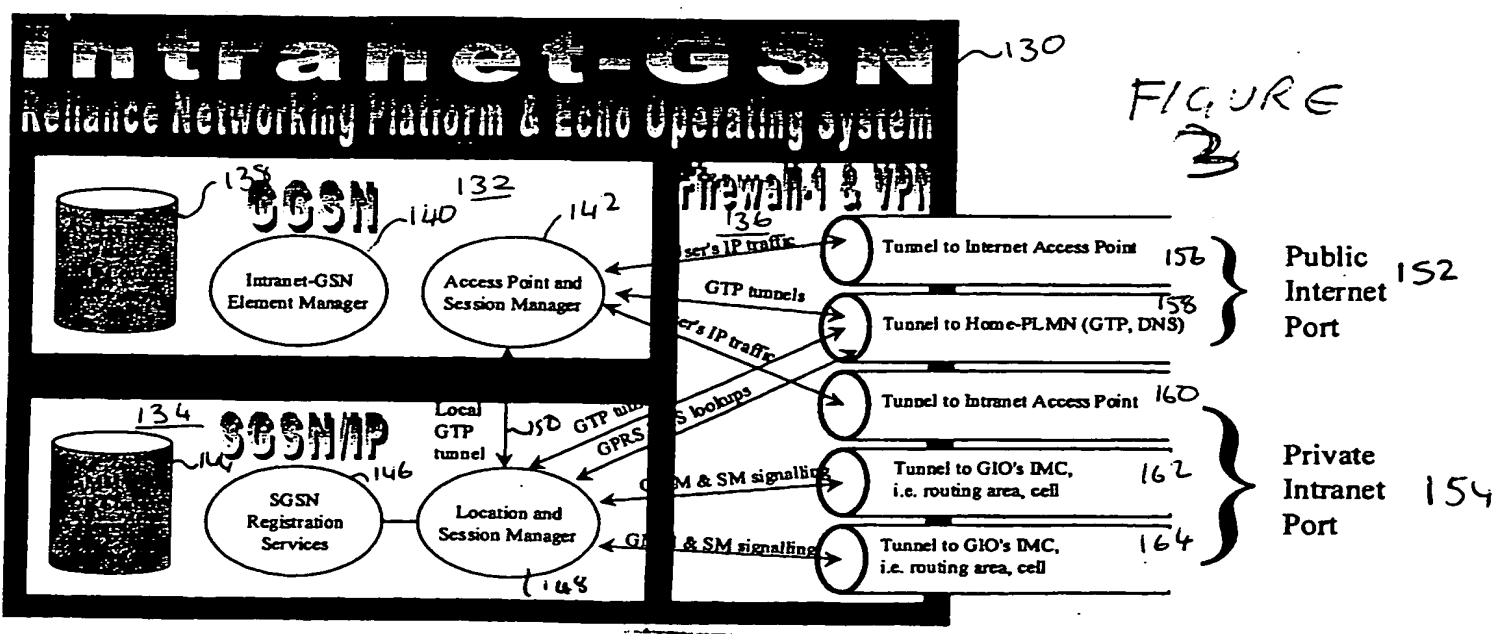


FIGURE 3

**THIS PAGE BLANK (USPTO)**